


CTF型外循环插管凸出式滚珠丝杠副



单位：mm

注：CTF滚珠丝杠副其精度为GB/T17587.3-1998中5，7，10级。

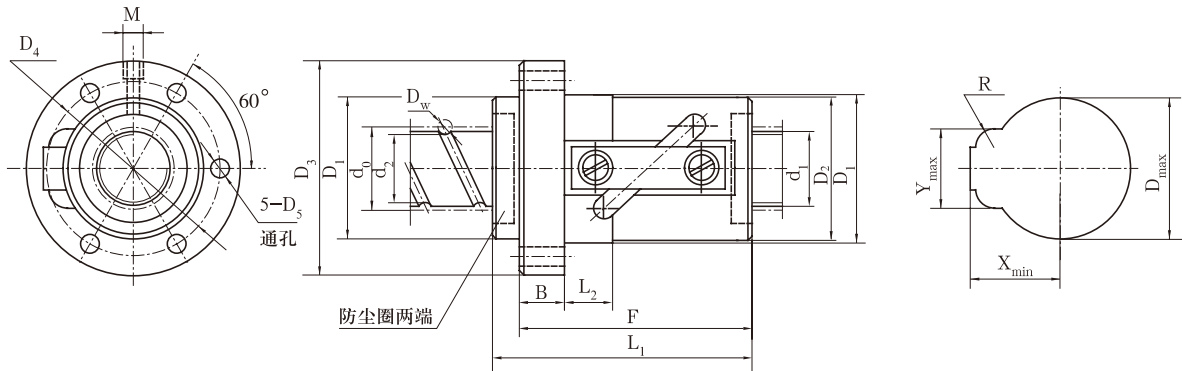

规格代号	公称 直径 d_0	公称 导程 P_{h0}	丝杠 外径 d_1	钢球 直径 D_w	丝杠 底径 d_2	循环总 圈数 n	基本额定负荷		螺母安装连接尺寸													规格代号
							动载荷 C_{0a} KN	静载荷	$D_1(g6)$	$D_2(-0.1/-0.2)$	D_3	D_4	D_5	X	Y	L_1	F	B	L_2	M	R	
CTF1610-2.5	16	10	15	3.175	12.7	2.5×1	6.8	13.1	32	32	53	42	5.5	19.3	19.5	57	52	10	10	M6	8	CTF1610-2.5
CTF2010-2.5	20	10	18.9	3.969	15.9	2.5×1	10.3	20.6	36	36	60	48	6.6	24	24	59	54	12	15	M6	10	CTF2010-2.5
CTF2016-1.5	20	16	18.9	3.969	15.9	1.5×1	6.5	12.1	36	36	60	48	7	23	24	66	61	12	15	M6	10	CTF2016-1.5
CTF2020-1.5	20	20	18.9	3.969	15.9	1.5×1	6.3	11.9	36	36	60	48	7	23	24	74	69	12	15	M6	10	CTF2020-1.5
CTF2520-1.5	25	20	23.8	4.763	20.1	1.5×1	9.3	18.6	40	40	66	53	7	28	29	78	72	12	15	M6	10	CTF2520-1.5
CTF2525-1.5	25	25	23.8	4.763	20.1	1.5×1	9.1	18.3	40	40	66	53	7	28	29	89	83	12	15	M6	10	CTF2525-1.5
CTF3225-1.5	32	25	30.8	4.763	27.1	1.5×1	10.3	22.9	50	50	82	67	9	32	33	85	79	15	20	M6	12	CTF3225-1.5
CTF3232-1.5	32	32	30.8	4.763	27.1	1.5×1	10.4	24.1	50	50	82	67	9	33	35	99	91	15	20	M6	12	CTF3232-1.5
CTF4032-1.5	40	32	38.2	6.35	33.5	1.5×1	17	39.4	63	63	108	85	11	42	44	112	104	18	25	M8×1	14	CTF4032-1.5
CTF4040-1.5	40	40	38.2	6.35	33.5	1.5×1	16.6	38.8	63	63	108	85	11	41	44	122	112	18	25	M8×1	14	CTF4040-1.5